


Mechanical Specifications

D	22.0 mm Max
T	6.0 mm Max
Lead Diameter	1.0 mm Nom
S	7.8 mm Nom
L	38.0 mm Min
Straight Leads	Standard

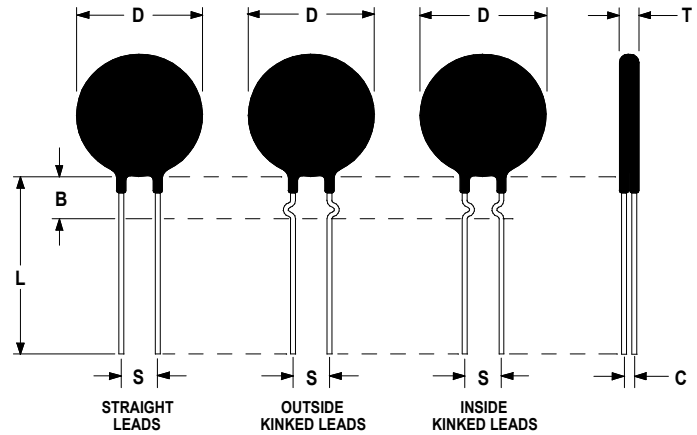

Electrical Specifications

Resistance @ 25°C	10.0 Ω ± 30%
Transition Temp	110 Deg C
Max voltage Rating	480 v rms
Switch Current @ 25°C	0.800A
Continuous Current @ 25°C	0.400A
Heat Capacity	2.0 Joules/°C
Dissipation Constant	22.50 mW/°C
Thermal Time Constant	65.0 seconds
Max Body Temperature @ Max voltage	174°C

Ametherm, Inc
3111 N. Deer Run Road Bldg. 4
Carson City, NV 89701
Telephone: **800-808-2434**
Fax: 702 884-0670
www.Ametherm.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Ametherm:](#)

[CL20 100120](#) [CL20 100120-B](#) [CL20 100120-A](#)